


- Real 720 bar operating pressure, 2880 bar burst pressure
- Made from polyflex material, slim and flexible design
- 2 spiral layers of high tensile steel wire covered by plastic
- High strength, suitable for use in hydraulic oil
- Twin hose available in almost all RAL colours
- Low volumetric expansion of 3,1 ml/m
- Made in Germany, brand Parker with CE marking



Model No	Working Pressure		Burst Pressure		Inner D.- Outer D.		Bend Radius	Weight
	bar	psi	bar	psi	mm	mm	mm	kg/m
**	720	10.440	2.880	41.760	6,4	12,5	70	0,25
<b>2340N-04V10</b>	720	10.440	2.880	41.760	6,4	12,5	70	0,25

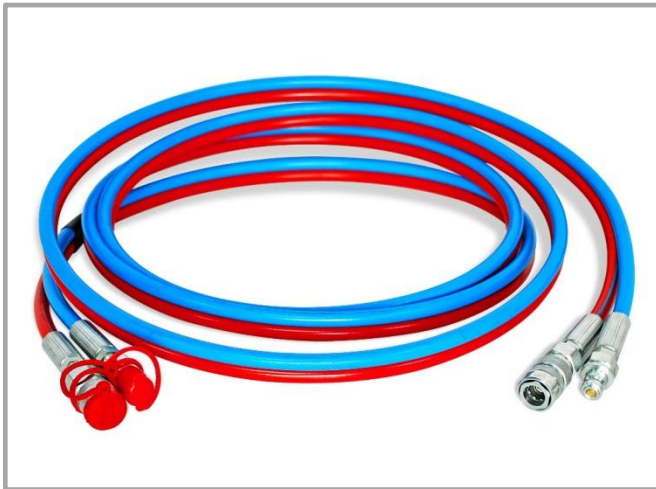

<b>Working Pressure</b>	720 bar
<b>Burst Pressure</b>	2.880 bar
<b>Safety Factor</b>	1:4
<b>Inner Diameter</b>	6,4 mm ±0,1mm ( ¼")
<b>Outer Diameter</b>	12,5 mm ±0,1mm
<b>Bend Radius</b>	70 mm
<b>Inner Core</b>	Polyamid PA12
<b>Pressure Reinforcement</b>	2 spiral layers 2 open spiral layers of high tensile steel wire
<b>Outer Core</b>	TPU
<b>Change in Length</b>	± 2 %
<b>Volumetric Expansion</b>	10,0%
<b>Impulse Strength</b>	> 200.000 impulse cycles (acc. to DIN EN ISO 6803 )
<b>Operating Temperature</b>	-40 C° + 100 C°